


■ POLYMER ADDITIVES

JADEWIN AN 5057

ANTIOXIDANT

CHEMICAL COMPONENT

| | |
|-----------|--|
| COMPONENT | Benzenamine,N-phenyl-,reactionproductswith2,4,4-trimethylpentene |
| CAS | 68411-46-1 |
| M.W | 394 |

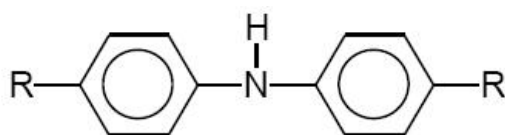

R: t-octyl & t-butyl

SPECIFICATION AND PHYSICAL PROPERTIES

| TEST | UNIT | SPECIFICATION |
|-----------------|------|--------------------|
| APPEARANCE | | CLEAR AMBER LIQUID |
| VISCOSITY(40°C) | | 600MAX |
| N CONTENT | % | 4.0-5.0 |

FEATURE AND APPLICATION

- * Liquid octylated/butylated diphenylamine antioxidant for lubricants
- * High nitrogen content
- * Effectively controls lubricants viscosity increase due to oxidation
- * Excellent protection against thermo-oxidative degradation of lubricating oils
- * Application include Mineral oil based industrial lubricants, Synthetic industrial lubricants, Greases and Engine oils
- * Approved by FDA for use in blending food grade lubricants
- * JADEWIN AN 5057 and lubricants formulated with JADEWIN AN 5057 may discolor in use, This has no effect on performance.
- * For additional information please consult the Material safety Data Sheet
- * For additional information please consult the Material Safety Data Sheet.



JADEWIN

杰得盈

**QINGDAO JADE NEW MATERIAL
TECHNOLOGY CO.,LTD**

青岛杰得佳新材料科技有限公司

PACKING

180Kg Drum

STORAGE

Keep container tightly closed and dry and storage in cool place

CHEMICAL INVENTORIES

Australia - AICS
Canada - DSL
EU - EINECS
China - IECSC
Japan - ENCS
New Zealand - NZIoC
Korea - ECL
USA - TSCA
Philippines - PICCS