


Self-Sufficient and Exclusive Oxygenation of Methane and Its Source Materials with Oxygen to Methanol via Metgas Using Oxidative Bi-reforming

George A. Olah,* G. K. Surya Prakash, Alain Goeppert, Miklos Czaun, and Thomas Mathew

Loker Hydrocarbon Research Institute and Department of Chemistry, University of Southern California, University Park, Los Angeles, California 90089-1661, United States

ABSTRACT: A combination of complete methane combustion with oxygen of the air coupled with *bi-reforming* leads to the production of metgas (H₂/CO in 2:1 mole ratio) for exclusive methanol synthesis. The newly developed *oxidative bi-reforming* allows direct oxygenation of methane to methanol in an overall economic and energetically efficient process, leaving very little, if any, carbon footprint or byproducts.

One of the major challenges of hydrocarbon chemistry is to convert methane to methanol by the overall insertion of a single oxygen atom (oxygenation)¹ in high yield and selectivity without the formation of other oxidation products (eq 1).




Over the years, extensive attempts have been carried out, and still are, on the selective direct oxygenation of methane to methanol. Numerous publications and patents claimed some success but only under extreme conditions (very high dilution with excess methane, short contact time, low temperature, etc.) and generally only in low conversions.^{2–8} Attempts to increase yields inevitably resulted in loss of selectivity. Therefore, effective oxidative synthesis of methanol by direct methane oxidation is considered not feasible. During the course of direct methane oxidation, the thermodynamically as well as kinetically favored formation of further oxidation products, i.e., formaldehyde, formic acid, and eventually carbon dioxide, is inevitable (Scheme 1).

The practical synthesis of methanol was developed on the basis of syn-gas (a mixture of CO and H₂) in the 1920s in Germany in the context of the so-called Fischer–Tropsch chemistry.⁹ It was originally based on coal but subsequently shifted to more convenient natural gas. The conversion of natural gas by steam or dry (CO₂) reforming as well as partial

oxidation produces H₂/CO mixtures with a molar ratio generally between 3 and 1 (Scheme 2). However, to produce

Scheme 2. Reforming Processes



methanol, a specific 2:1 H₂:CO mixture is needed, which we have named *metgas*.¹⁰ This is rarely achieved in conventional reforming processes. When H₂ is present in excess, CO₂ is added to the syngas mixture for the subsequent methanol synthesis.


Furthermore, the overall reforming process is strongly endothermic. In modern processes (Haldor–Topsøe, Lurgi, Linde and others), part of the natural gas is combusted *in situ* to provide the needed heat energy (autothermal reforming). This renders, however, the needed metgas production even more complex and costly (up to some 60% of the overall cost of a methanol plant),¹⁰ involving separation, purification, and adjustments such as the water–gas shift reaction.

In extensive studies,^{11–16} effective metgas formation with a combination of endothermic steam and dry (CO₂) reforming providing also the required reaction heat was found not to be feasible.¹⁷

We have recently reported a facile new way called *bi-reforming* to produce metgas from methane (natural or shale gas) in a single step combining the steam and dry reforming reactions by reacting methane, CO₂, and steam in a 3:1:2 ratio over Ni/MgO or related catalysts at 800–950 °C in a pressurized tubular flow-reactor at 5–30 atm (Scheme 2).^{18,19}

We now report a significant further advance of exclusive self-sufficient conversion of methane and its source materials such as natural (shale) gas, coal-bed methane, tight-sand gas, biogas, or methane hydrates to metgas for methanol synthesis by selective *oxygenation* of methane using a process we call *oxidative bi-reforming*. Oxygenation (i.e., oxygen functionalization) as defined and discussed means substitution or insertion of oxygen into a C–H or C–C bond of a hydrocarbon, thus essentially different from conventional oxidations.¹ *Bi-reforming*^{18,19} of methane (from natural or shale gas) is highly endothermic, necessitating substantial external energy as well as multi-step feed preparation. Traditionally practiced partial

Scheme 1. Direct Oxidation of Methane

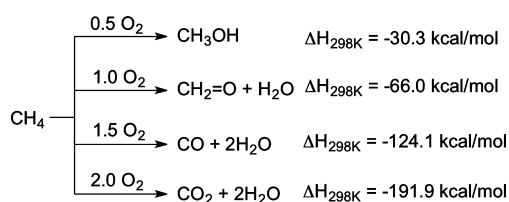


Received: May 30, 2013

Published: June 24, 2013

oxidation and reforming (autothermal reforming) also necessitates costly separation steps and adjustments.¹⁷ In contrast, the complete combustion of 1 equiv of methane with O₂ from the air gives the needed reaction and process heat for the subsequent *bi-reforming* step. Furthermore, it also provides the required CO₂–2H₂O mixture, which is mixed with 3 equiv of methane (natural gas), giving the needed specific feed for *bi-reforming* to produce exclusively metgas for the subsequent methanol synthesis step (Scheme 3).²⁰

Scheme 3. Oxidative Bi-reforming for Methanol Synthesis

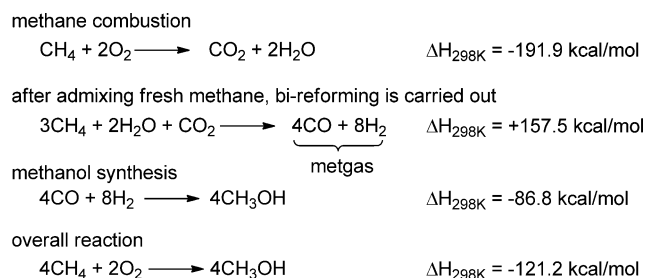

The self-sufficient *oxidative bi-reforming* of methane to metgas can be carried out in a single bundled multi-tubular reactor or in two separate reactors. It allows separate combustion of 1 equiv of methane with the oxygen of the air to give a CO₂–2H₂O flue gas mixture. After admixing of 3 equiv of fresh methane upstream of the flame followed by *bi-reforming*,^{18–20} the formed metgas is then converted to methanol in a well-known and industrially practiced synthesis step using Cu/ZnO/Al₂O₃ or related catalysts. Furthermore, the exothermic heat of reaction of methane combustion is more than sufficient for the subsequent endothermic *bi-reforming* process.^{18,19,21} Thus, methanol produced from the still-abundant natural or shale gas resources that can last well into the next century can be used as a replacement for petroleum oil and its derived products while also decreasing their environmental harm (global warming) via CO₂ capture and recycling (CCR) in a feasible, economic way for use in our previously developed *Methanol Economy*.¹⁰

The presently developed *oxidative bi-reforming* followed by methanol synthesis thus achieves the long-sought-after goal of transforming methane to methanol in high yield and selectivity (eq 1) with no other oxidation products formed in this overall economic and energetically efficient process, leaving very little, if any, carbon footprint.

AUTHOR INFORMATION

Corresponding Author

olah@usc.edu

Notes

The authors declare no competing financial interest.

ACKNOWLEDGMENTS

Support of our work by the Loker Hydrocarbon Research Institute and the U.S. Department of Energy is gratefully acknowledged.

REFERENCES

(1) Olah, G. A.; Molnár, Á. *Hydrocarbon Chemistry*, 2nd ed.; Wiley-Interscience: Hoboken, NJ, 2003.

- (2) Gesser, H. D.; Hunter, N. R.; Prakash, C. B. *Chem. Rev.* **1985**, *85*, 235.
- (3) Lunsford, J. H. *Catal. Today* **2000**, *63*, 165.
- (4) Alvarez-Galvan, M. C.; Mota, N.; Ojeda, M.; Rojas, S.; Navarro, R. M.; Fierro, J. L. G. *Catal. Today* **2011**, *171*, 15.
- (5) Tabata, K.; Teng, Y.; Takemoto, T.; Suzuki, E.; Bañares, M. A.; Peña, M. A.; Fierro, J. L. G. *Catal. Rev.* **2002**, *44*, 1.
- (6) Holmen, A. *Catal. Today* **2009**, *142*, 2.
- (7) Brown, M. J.; Parkyns, N. D. *Catal. Today* **1991**, *8*, 305.
- (8) Zhang, Q.; He, D.; Zhu, Q. *Nat. Gas Chem.* **2003**, *12*, 81.
- (9) Weissermel, K.; Arpe, H.-J. *Industrial Organic Chemistry*, 4th ed.; Wiley-VCH: Weinheim, 2003.
- (10) Olah, G. A.; Goepfert, A.; Prakash, G. K. S. *Beyond Oil and Gas: The Methanol Economy*, 2nd ed.; Wiley-VCH: Weinheim, 2009, and references therein.
- (11) Roh, H.-S.; Koo, K. Y.; Jeong, J. H.; Seo, Y. T.; Seo, D. J.; Seo, Y.-S.; Yoon, W. L.; Park, S. B. *Catal. Lett.* **2007**, *117*, 85.
- (12) Roh, H.-S.; Koo, K. Y.; Joshi, U. D.; Yoon, W. L. *Catal. Lett.* **2008**, *125*, 283.
- (13) Koo, K. Y.; Roh, H.-S.; Jung, U. H.; Yoon, W. L. *Catal. Lett.* **2009**, *130*, 217.
- (14) Koo, K. Y.; Roh, H.-S.; Seo, Y. T.; Seo, D. J.; Yoon, W. L.; Park, S. B. *Int. J. Hydrogen Energy* **2008**, *33*, 2036.
- (15) Baek, S.-C.; Bae, J.-W.; Cheon, J. Y.; Jun, K.-W.; Lee, K.-Y. *Catal. Lett.* **2011**, *141*, 224.
- (16) Jun, H. J.; Park, M.-J.; Baek, S.-C.; Bae, J.-W.; Ha, K.-S.; Jun, K.-W. *J. Nat. Gas Chem.* **2011**, *20*, 9.
- (17) Rostrup-Nielsen, J.; Christiansen, L. J. *Concepts in Syngas Manufacture*; Imperial College Press: London, 2011.
- (18) Olah, G. A.; Goepfert, A.; Czaun, M.; Prakash, G. K. S. *J. Am. Chem. Soc.* **2013**, *135*, 648.
- (19) Olah, G. A.; Prakash, G. K. S. U.S. Patents 7,906,559, 2011; 8,133,926, 2012; 8,440,729, 2013.
- (20) Using hydrogen-treated 15% NiO on MgO at 850 °C.
- (21) Olah, G. A.; Prakash, G. K. S. U.S. Pat. Appl. 13791778, 2013.