


Green Chemistry

Cutting-edge research for a greener sustainable future

Accepted Manuscript

This article can be cited before page numbers have been issued, to do this please use: Y. Tao, B. Singh, V. Jindal, Z. Tang and P. P. Pescarmona, *Green Chem.*, 2019, DOI: 10.1039/C9GC02623A.

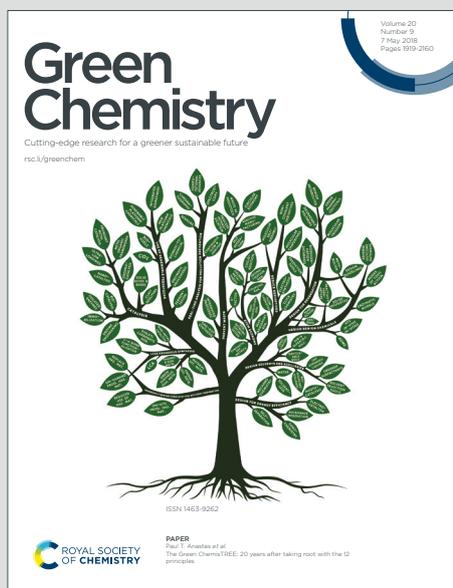

This is an Accepted Manuscript, which has been through the Royal Society of Chemistry peer review process and has been accepted for publication.

Accepted Manuscripts are published online shortly after acceptance, before technical editing, formatting and proof reading. Using this free service, authors can make their results available to the community, in citable form, before we publish the edited article. We will replace this Accepted Manuscript with the edited and formatted Advance Article as soon as it is available.

You can find more information about Accepted Manuscripts in the [Information for Authors](#).

Please note that technical editing may introduce minor changes to the text and/or graphics, which may alter content. The journal's standard [Terms & Conditions](#) and the [Ethical guidelines](#) still apply. In no event shall the Royal Society of Chemistry be held responsible for any errors or omissions in this Accepted Manuscript or any consequences arising from the use of any information it contains.

ARTICLE

Niobium oxide prepared through a novel supercritical-CO₂-assisted method as highly active heterogeneous catalyst for the synthesis of azoxybenzene from anilineYehan Tao,^a Bhawan Singh,^a Vanshika Jindal,^a Zhenchen Tang,^a Paolo P. Pescamona^{*a}Received 00th January 20xx,
Accepted 00th January 20xx

DOI: 10.1039/x0xx00000x

High-surface area Nb₂O₅ nanoparticles were synthesised by a novel supercritical-CO₂-assisted method (Nb₂O₅-scCO₂) and were applied for the first time as a heterogeneous catalyst in the oxidative coupling of aniline to azoxybenzene using the environmentally friendly H₂O₂ as the oxidant. The application of scCO₂ in the Nb₂O₅-scCO₂ resulted in significantly enhanced catalytic activity compared to a reference catalyst prepared without scCO₂ (Nb₂O₅-Ref) or to commercial Nb₂O₅. Importantly, the Nb₂O₅-scCO₂ catalyst achieved an aniline conversion of 86% (stoichiometric maximum 93% with the employed aniline-to-H₂O₂ ratio of 1:1.4) with azoxybenzene selectivity of 92% and with 95% efficiency in H₂O₂ utilisation in 45 min without requiring external heating (the reaction is exothermic) and with an extremely low catalyst loading (weight ratio between catalyst and substrate, R_{c/s} = 0.005). This performance largely surpasses that of any other heterogeneous catalyst previously reported for this reaction. Additionally, the Nb₂O₅ catalyst displayed high activity also for substituted anilines (e.g. methyl or ethyl-anilines and *para*-anisidine) and was reused in consecutive runs without loss of activity. Characterisation by means of N₂-physisorption, XRD, FTIR and TEM allowed to correlate the remarkable catalytic performance of Nb₂O₅-scCO₂ to its higher surface area and discrete nanoparticle morphology compared to the aggregated larger particles constituting the material prepared without scCO₂. A catalytic test in the presence of a radical scavenger proved that the reaction follows a radical pathway.

Introduction

Over the past few years, azoxybenzene and its derivatives have garnered interest due to their importance in organic synthesis as intermediates for producing dyes or medicines, as inhibitors or stabilisers for polymerisation, and as liquid crystals in electronic displays.¹⁻⁴ For example, azoxybenzene is the precursor to prepare hydroxyazobenzene, a common azo dye, by Wallach rearrangement.⁵ Reductive cleavage of azoxybenzene or its derivatives gives indazole derivatives, which have pharmaceutical activity.⁶ Methoxy-substituted azoxybenzene, i.e. azoxyanisole, is one of the first known and most readily prepared liquid crystals.⁷ In addition, exploration in the functionalisation of azoxybenzene, such as acylation or


alkenylation have also been reported.⁸ Azoxybenzene can be synthesised either by oxidative coupling of aniline or by selective reduction of nitrobenzene or nitrosobenzene. The reduction route has been extensively studied, employing for example Ni-C-CeO₂,⁹ Au-hydrotalcite,¹⁰ Ag-Cu-ZrO₂,¹¹ Pd-CdS¹² as catalysts. At the industry scale, nitrobenzene is prepared by nitration of benzene with a mixture of concentrated sulphuric acid, nitric acid and water, whereas nitrosobenzene is prepared by reduction of nitrobenzene. Both of them are obtained from petroleum-based raw materials. On the other hand, the production of aniline from renewable resources (unrefined raw sugar) has been recently reported by Covestro,¹³ which makes the oxidation route preferable from a green chemistry point of view.

The oxidation route comprises competitive oxidation and condensation reactions (Scheme 1). Therefore, the reaction can generate several products, including phenylhydroxylamine,¹⁴ nitrosobenzene,¹⁵ azobenzene,¹⁶ azoxybenzene¹⁷ and nitrobenzene.¹⁸ This represents a major challenge for achieving high selectivity towards a specific product, such as azo or azoxybenzene. Several metal-based heterogeneous catalysts have been applied in the oxidation of aniline and its substituted derivatives with the aim of selectively yielding azoxy products using H₂O₂ as the oxidant. H₂O₂ is an environmentally friendly oxidant as it gives water as the only side product, it can be operated at ambient pressure

^a Chemical Engineering Group, Engineering and Technology Institute Groningen (ENTEG), Faculty of Science and Engineering, University of Groningen, Nijenborgh 4, 9747 AG Groningen, The Netherlands.

† Electronic Supplementary Information (ESI) available: Image of high-throughput scCO₂ reactor. Kinetic study of 20 mmol aniline conversion over the Nb₂O₅-scCO₂ catalyst. Pictures of 50 mmol aniline conversion over Nb₂O₅-scCO₂ and Nb₂O₅-Ref catalysts as a function of time. XRD pattern of Nb₂O₅-800°C. TEM pictures of Nb₂O₅-scCO₂. SEM images of Nb₂O₅-scCO₂ and Nb₂O₅-Ref catalysts. Pictures of conversion of aniline with different concentrations of H₂O₂ after 25 min. Plots of aniline conversion and products yields in different solvents. Reusability test of the Nb₂O₅-scCO₂ catalyst. Comparison with previously reported heterogeneous catalysts. List of chemicals and their purity used in this work. Reaction pathway from oxidative coupling of aniline with H₂O₂ to azoxybenzene over Nb₂O₅-scCO₂ catalyst. See DOI: 10.1039/x0xx00000x



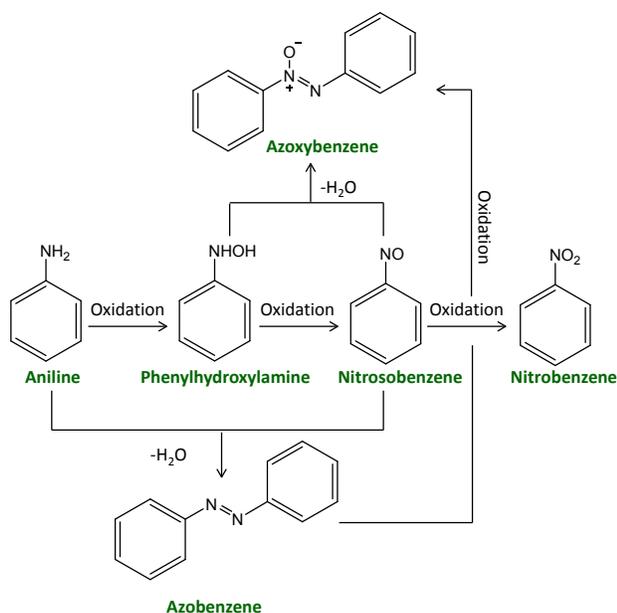

Scheme 1 Generally-accepted reaction scheme for the synthesis of azoxybenzene via the oxidation of aniline.

and more safely compared to molecular oxygen,^{15,19} and is significantly cheaper and greener compared to other oxidants that have been reported for this reaction, such as peracetic acid,²⁰ tert-butylhydroperoxide, dimethyldioxirane,²¹ sodium perborate.²² An overview of the state-of-the-art heterogeneous catalysts for the oxidative coupling of aniline with H₂O₂ as the oxidant is shown in Table S1†. Ti-based materials such as TiO₂^{23–25} and Ti-silicates (TS-1,^{26,27} Ti-MCM-48,²⁸ TAPSO-5, Ti-HMS, Ti-Beta²⁹) are the most common type of heterogeneous catalysts that have been reported for this reaction. They have been reported to activate H₂O₂ by forming hydroperoxo species.^{23,28} Most of these Ti-based catalysts typically operate in the 50–70 °C temperature range, while the TiO₂ pillared montmorillonite clays (~60 wt% TiO₂) allowed the oxidation of aniline at room temperature (RT), reaching 50% aniline conversion with 99% azoxybenzene selectivity after 8 h with a weight ratio between catalyst and substrate, $R_{c/s} = 0.02$.²⁵ Other metal oxide catalysts such as Co-Si-oxide³⁰ and CuCr₂O₄³¹ were also reported to catalyse the oxidative coupling of aniline. Higher temperatures (70 or 80 °C) were used in both cases to obtain higher than 70% conversion (Table S1†). Supported metal nanoparticles have also been reported as catalysts for aniline oxidation with H₂O₂. For example, an Ag-WO₃ catalyst, in which the Ag nanoparticles were proposed to be the sites responsible for the activation of H₂O₂,³² exhibited an aniline conversion of 87% with an azoxybenzene selectivity of 91% at RT after 24 h employing a $R_{c/s} = 0.1$. A non-noble metal catalyst Cu-CeO₂ was reported to display higher aniline conversion and azoxybenzene selectivity compared to the Ag-WO₃ catalyst after 6 h with the same $R_{c/s}$, albeit using 50 °C as reaction temperature.³³ Control tests showed that the Cu nanoparticles acted as catalytic sites while CeO₂ performed as support. The above-mentioned catalytic

systems achieve good performance but still have some limitations, which can be related to the synthesis of the catalysts (e.g. synthesis requiring expensive templates^{26–33} or dangerous chemicals such as hexafluorosilicic acid²⁴) and/or to the employed conditions in which the oxidation of aniline is carried out (e.g. relatively high reaction temperatures,^{23,24,26,28,29,31,33} problematic or hazardous solvents^{26,27,29–33} and/or high loading of catalyst, e.g. $R_{c/s} > 0.1$, see Table S1†)^{23,27,29,31–33} On this backdrop, we report the novel synthesis of amorphous Nb₂O₅ nanoparticles in supercritical CO₂ medium and their application as heterogeneous catalyst with superior performance for the oxidative coupling of aniline and derivatives to produce (substituted) azoxybenzene. The catalyst allowed performing the reaction at room temperature with an extremely low catalyst loading ($R_{c/s} = 0.005$) in a green solvent as ethanol,³⁴ displaying very high aniline conversion and azoxybenzene yield in a short reaction time. All these achievements represent an important green advance as they would allow carrying out the conversion of (potentially) bio-based aniline into a useful compound under extremely mild and green conditions.

A crucial factor in achieving a catalyst with enhanced activity was the development of a novel supercritical-CO₂-assisted precipitation method for the preparation of highly-dispersed Nb₂O₅ nanoparticles. CO₂ in supercritical state (scCO₂) is an attractive reaction medium for preparing nanostructured oxide catalysts for the combination of its properties, which are intermediate between those of a liquid and a gas and can be easily tuned by changing temperature and pressure. More specifically, scCO₂ has good dissolving ability that can be exploited to promote the contact between compounds with different physicochemical features (e.g. polar and apolar; gas and liquid). In addition, scCO₂ has high diffusivity and extremely low surface tension, which are very important for maximum preservation of the formed nanostructures when removing CO₂ from the system, which can be achieved simply by depressurisation.³⁵ It has been extensively reported that the formation of nanomaterial typically proceeds differently with the assistance of scCO₂.^{36–38} Further advantages of the use of scCO₂ as reaction medium include the low toxicity and low cost of carbon dioxide and the relatively mild conditions needed to achieve its supercritical point for CO₂ ($T_c = 31.1$ °C, $p_c = 73.9$ bar).

Experimental

Materials

Niobium chloride (NbCl₅), deionised water and ethanol were used for the preparation of the Nb₂O₅ materials. Commercially available Nb₂O₅ (Nb₂O₅-Comm), TiO₂-P25, and WO₃ (WO₃-Comm) were used as reference catalysts. For the catalytic tests, aniline, *ortho*-toluidine, *meta*-toluidine, *para*-toluidine, 2-ethylaniline, 3-ethylaniline, 4-ethylaniline, *para*-anisidine, benzylamine were used as substrates, anisole was used as internal standard for gas chromatography (GC) analysis, while aqueous H₂O₂ with different concentrations (10 wt%, 20 wt%,



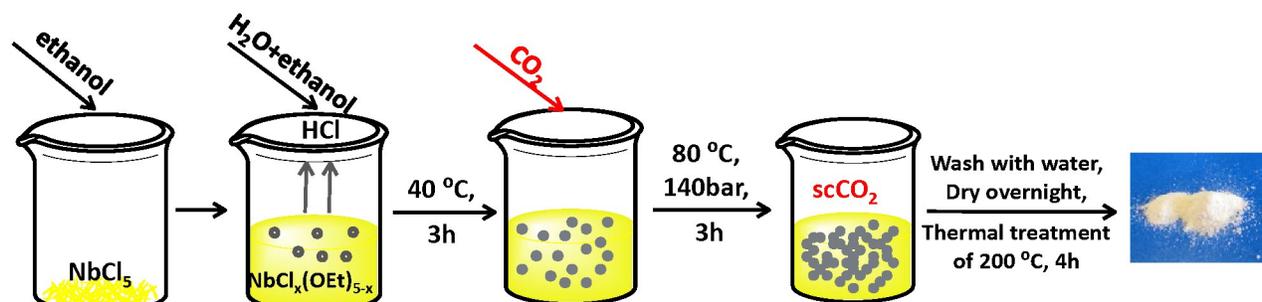


Fig. 1 Synthesis of $\text{Nb}_2\text{O}_5\text{-scCO}_2$ by scCO_2 -assisted precipitation method

30 wt% and 50 wt%) was employed as oxidant. Ethanol, 1,4-dioxane, acetone, acetonitrile, 2-butanol, isopropanol and methanol were tested as reaction solvents. 2,2,6,6-tetramethyl-1-piperidinyloxy (TEMPO) was used as radical scavenger. The purity and supplier of all chemicals (except for 10 wt% and 20 wt% H_2O_2) used during this research are listed in Table S2†. All chemicals were used without any further purification. The 10 wt% and 20 wt% H_2O_2 aqueous solutions were prepared by diluting 30 wt% H_2O_2 with deionised water.

Catalyst Preparation

Nb_2O_5 was prepared using a scCO_2 -assisted precipitation method, with a novel protocol developed by adapting the synthesis methods of other metal oxides in scCO_2 medium^{36,38,39} and by applying it to a precipitation method inspired by those used in the literature to prepare Nb_2O_5 .⁴⁰⁻⁴² The synthesis was carried out in a high-throughput scCO_2 reactor unit manufactured by Integrated Lab Solutions (ILS),⁴³ which consists of two modules: a batch reactor equipped with a borosilicate glass window to allow visualisation of the phase behaviour within the reactor, and a block with 10 batch reactors (Fig. S1†). The window reactor and the 10-reactors block can be used simultaneously with individual operations. Each reactor has a volume of 84 mL (30 mm internal diameter), can be stirred individually with a magnetic stirrer and is equipped with an automated closing valve that allows avoiding cross-contamination between reactors. The reactors are heated with electric heating elements, pressurised with an ISCO pump and cooled with a water-circulation system. The high-throughput unit can operate at a temperature between 20 and 200 °C and at a CO_2 pressure between 1 and 200 bar. An automated depressurisation protocols and rupture disks prevent risks of overpressure. In a typical synthesis of the $\text{Nb}_2\text{O}_5\text{-scCO}_2$ material, firstly a niobium precursor solution was prepared by dissolving 1.0 g NbCl_5 in 2 mL ethanol with magnetic stirring for 5 min. HCl was formed as gas product, indicating the formation of niobium ethoxide species. Then, 10 mL deionised water and 3 mL ethanol were added slowly to the stirred solution over 5 min. Upon the addition of water, the liquid became gradually opaque. Next, the mixture was transferred into the scCO_2 reactor and stirred vigorously at 40 °C for 3 h. At this stage, the white reaction mixture behaved

like a low-viscosity liquid. Then, the reactor was closed, heated up to 80 °C and pressurised with CO_2 to 140 bar while stirring (this process took around 1.5 h). The reaction mixture was allowed to react under scCO_2 condition for 3 h. Then, the reactor was cooled down to 20 °C and CO_2 was removed by slow depressurisation with an average rate of 1.5 bar/min. The obtained white slurry was aged overnight and then washed thoroughly with deionised water over a Büchner filter until the pH of the filtered water became neutral. Next, the material was dried overnight at 100 °C and the resulting powder was thermally treated in a calcination oven at 200 °C for 4 h with a heating rate of 2 °C/min. The catalyst prepared by this method was named $\text{Nb}_2\text{O}_5\text{-scCO}_2$. The synthesis process is summarised in Fig. 1. Since no formation of a gel was observed during the reaction, but only a precipitate, the used synthesis method is referred to as a scCO_2 -assisted precipitation method. The mass of the calcined powders was always above the 90% of the theoretical yield of Nb_2O_5 (around 0.45 g for each batch reactor). The as-prepared Nb_2O_5 powder was also thermally treated at 800 °C for 4 h with a heating rate of 2 °C/min and used as reference catalyst ($\text{Nb}_2\text{O}_5\text{-Ref}$) was prepared in a round-bottom flask with a similar procedure but without the assistance of scCO_2 . Briefly, 1.0 g NbCl_5 was dissolved in 2 mL ethanol by stirring for 5 min, after which 10 mL deionised water and 3 mL ethanol were added slowly in 5 min. Next, the solution was stirred at 40 °C for 3 h. Then, the mixture was heated up to 80 °C and stirred for another 3 h. Afterwards, the obtained product was aged, dried, washed and thermally treated with the same procedure as that used for $\text{Nb}_2\text{O}_5\text{-scCO}_2$.

Characterisation

The Nb_2O_5 materials were characterised by a combination of techniques. N_2 -physisorption isotherms were recorded on a Micromeritics ASAP 2420 apparatus at -196 °C. The surface area was evaluated with the BET method. Before N_2 adsorption, the samples were degassed in vacuum at 200 °C for 5 h. X-ray diffraction patterns (XRD) were recorded on a Bruker D8 Phaser diffraction meter equipped with $\text{Cu K}\alpha$ radiation ($\lambda = 1.5406 \text{ \AA}$). The XRD patterns were measured in reflection geometry in the 2θ range between 10 and 80°. Fourier transform infrared spectroscopy (FT-IR) measurements were performed with an IRTTracer-100 spectrometer by



averaging 64 scans with a spatial resolution of 4 cm⁻¹. The background spectrum was recorded by using an empty cell. Transmission electron microscopy (TEM) images were recorded using an electron microscope CM12 (Philips) operating at 120 keV. The samples were ground, then dispersed in ethanol by sonication and deposited on a holey-carbon-coated copper grid for TEM analysis. Scanning electron microscopy (SEM) analysis was carried out on a Philips XL30 ESEM microscope operating at 20 keV. The SEM samples were prepared by grinding the powder, dispersing it on a carbon tape and spraying it with gold. Elemental analysis was carried out by inductively coupled plasma optical emission spectroscopy (ICP-OES) instrument. The samples were digested using HF before the analysis.

Catalytic experiments

The liquid-phase oxidation of aniline was carried out in a round-bottom flask equipped with a magnetic stirrer and water-cooled condenser. A soft rubber cap was placed on top of the condenser instead of a glass cap for safety reasons to prevent accidents in the event of blowing up of the cap caused by possible pressure build-up due to H₂O₂ decomposition (*vide infra*). In a typical experiment, 20 mmol aniline, 10 mmol anisole and the desired amount of H₂O₂ were added to 10 mL of solvent. Safety note: The reaction without solvent under our optimum reaction condition showed vigorous bubbling and using a solvent could avoid pressure build-up. Then, 10 mg catalyst was added and the reaction mixture was stirred for 45 min without external heating. After the reaction time was over, the stirring was stopped and ca. 30 mL of ethanol were added to ensure that the reaction mixture was in one phase. Then, the catalyst was separated by centrifugation at 4000 rpm for 3 min. The supernatant was analysed by means of an Agilent Technologies 7980B GC equipped with an Agilent DB-5#6 (5%-Phenyl)-methylpolysiloxane column (15 m, 320 μm ID) and a flame ionisation detector. Safety note: though the employed conditions did not pose any safety issue, care should be taken when using acetone and hydrogen peroxide together as they can form acetoneperoxide (explosive).

For catalyst recycling tests, the rest of the supernatant was carefully removed by pipette. Then, ca. 45 mL ethanol was added to the centrifuge tube and the tube was shaken vigorously. Afterwards, the tube was centrifuged at 4500 rpm for 20 min. Next, the supernatant was removed by pipette and ca. 45 mL fresh ethanol was added. This washing procedure was repeated for 5 times. Then, the catalyst was dried under 100 °C overnight and regenerated by thermal treatment in a calcination oven under 200 °C for 4 h with a heating rate of 2 °C/min before reuse. For the leaching test, after 10 min of reaction the Nb₂O₅-sCO₂ catalyst was separated from the reaction mixture by centrifugation (4000 rpm, 3 min), followed by filtration with a filter connected to a syringe. A small aliquot of the filtrate was analysed by GC. The remaining filtrate was stirred for further 35 min at room temperature, after which

the solution was analysed by GC. The molar amounts of aniline and products (azoxybenzene, azobenzene, nitrobenzene and nitrosobenzene) were calculated by the following formula:

$$mmol_x = \frac{Area_x}{Area_{IS}} \times mmol_{IS} \times \frac{1}{Rf_x}$$

where x is the compound whose molar amount is to be found and IS is the internal standard, *i.e.* anisole. Rf_x was the relative response factor of each compound (with respect to the IS) and was obtained by calibration of commercial compound x with IS. The formulae used for the calculation of the aniline conversion, for the selectivity and yield of products and for the productivity (Prod), turn over number (TON) and turn over frequency (TOF) of the catalyst are:

$$Conv. = \frac{mole_{aniline.init.} - mole_{aniline.end.}}{mole_{aniline.init.}} \times 100\%$$

$$Sel_x = \frac{n \times moles\ of\ product\ x}{mole_{aniline.init.} - mole_{aniline.end.}} \times 100\%$$

(n = 1 for for nitrosobenzene and nitrobenzene, n = 2 for azobenzene and azoxybenzene)

$$Yield_x = Conv. \times Sel_x$$

$$Prod = \frac{mass_{azoxybenzene.end.} (g)}{mass_{catalyst} (g) \times reaction\ time (h)}$$

$$TON = \frac{mole_{azoxybenzene.end.} (mol)}{mole_{catalyst} (mol)}$$

$$TOF = \frac{TON}{reaction\ time (h)}$$

Results and discussion

In this work, we studied the aniline oxidative coupling to azoxybenzene using H₂O₂ as oxidant under mild reaction condition over a Nb₂O₅-sCO₂ catalyst. The catalyst was prepared by a novel sCO₂-assisted procedure; the ease, high yield and low cost of which are assets in the perspective of scale-up of the catalyst production. The choice of investigating Nb₂O₅ as catalyst for the oxidation of aniline with H₂O₂ stems from the reported ability of this oxide to activate H₂O₂ for oxidation reactions through the formation of active oxygen species, including peroxy, superoxy and hydroxyl radical species.^{44,45} The exact form of active oxygen species depends on the active sites of the catalyst and the reaction conditions (e.g. pH, H₂O₂ concentration). Until now, Nb₂O₅ has been applied as heterogeneous catalyst in many reactions employing H₂O₂ as the oxidant, such as the oxidation of organic sulfides,^{44,45} glycerol, and alkenes.⁴⁶ Carreño et al. reported that Nb₂O₅ prepared by a microwave-assisted hydrothermal method catalysed the oxidation of aniline with H₂O₂ at 25 °C with phenylhydroxylamine and nitrosobenzene as main products.¹⁴ To the best of our knowledge, the application of Nb₂O₅ in aniline oxidation with azoxybenzene as product has not been reported yet. On the other hand, two



heterogeneous catalysts containing Nb in their formulation have been recently reported in aniline oxidation with H₂O₂ to

Table 1 Activity of Nb₂O₅-scCO₂ and reference heterogeneous catalysts in the conversion of aniline to azoxybenzene at room temperature.

Entry	Catalyst	Conversion (%) ^a	Yield (%)				Selectivity (%)			
			Azoxy.	Nitroso.	Nitro.	Azo.	Azoxy.	Nitroso.	Nitro.	Azo.
1	Nb ₂ O ₅ -scCO ₂	86	79	4	2	1	92	5	2	1
2	Nb ₂ O ₅ -Comm	4	0	4	0	0	0	> 99	0	0
3	TiO ₂ -P25	5	0	5	0	0	0	> 99	0	0
4	WO ₃ -Comm	3	0	3	0	0	0	> 99	0	0
5	Blank ^b	2	0	2	0	0	0	> 99	0	0
6	Nb ₂ O ₅ -scCO ₂ ^c	<1	0	<1	0	0	0	>99	0	0
7	Nb ₂ O ₅ -scCO ₂ ^d	5	0	5	0	0	0	> 99	0	0
8	Nb ₂ O ₅ -800°C	4	0	4	0	0	0	>99	0	0

Reaction conditions: 20 mmol aniline, 28 mmol of H₂O₂ (as 30 wt% aqueous solution), 10 mmol anisole, 10 mL ethanol, 10 mg of the selected catalyst ($R_{c/s} = 0.005$), room temperature, 45 min. ^a Under the employed reaction conditions (aniline : H₂O₂ = 1 : 1.4), the theoretical maximum conversion is 93%. ^b Without catalyst. ^c Without H₂O₂. ^d In the presence of TEMPO (1 mol% to H₂O₂) as radical scavenger.

produce azoxybenzene. NbOOH supported on FeOOH was reported to reach full aniline conversion with 70% azoxybenzene selectivity after 25 h at RT, though this required a relatively high $R_{c/s}$ of 0.1 (see Table S1†).⁴⁷ A Nb-Zn-Al-oxide catalyst (~4 wt% Nb loading, $R_{c/s} = 0.1$) was reported to reach 92% azoxybenzene yield in the presence of UV irradiation for 48 h, whereas the yield dropped to 0% without irradiation.⁴⁸ The initial test with Nb₂O₅-scCO₂ as heterogeneous catalyst for the oxidation of aniline to azoxybenzene with aqueous H₂O₂ as the oxidant was carried out at room temperature and with a low catalyst loading ($R_{c/s} = 0.005$) compared to the values generally employed in the literature (Table S1†). Under these challenging conditions, an excellent aniline conversion of 86% was achieved in 45 min (stoichiometric maximum 93% with the employed H₂O₂ ratio of 1.4), with azoxybenzene selectivity of 92% (Table 1, Entry 1). The productivity of the Nb₂O₅-scCO₂ catalyst is remarkably high (209 grams of azoxybenzene generated per gram of catalyst in 1 h), which is more than double that of the previous optimum and around two orders of magnitude larger than most of the catalysts reported in the literature (Table S1†). Additionally, the TON and TOF values for the Nb₂O₅-scCO₂ catalyst after 45 min of reaction were calculated to be 129 and 172 h⁻¹, respectively, based on the Nb content (57 wt%) of Nb₂O₅-scCO₂ obtained by ICP-OES analysis. The catalytic performance of Nb₂O₅-scCO₂ was directly compared under the same reaction conditions to that of selected commercial catalysts (Nb₂O₅-Comm, TiO₂-P25, and WO₃-Comm), which were chosen since they have been extensively reported to be able to activate H₂O₂ towards oxidation reactions (Table 1, entry 2-4).^{23,46,49} Only minor amounts (< 5%) of aniline could be converted and the only product was nitrosobenzene over these reference catalysts and even TiO₂-P25, which had been reported to catalyse this reaction at 60 °C,²⁴ gave only slightly higher conversion at room temperature compared to a blank reaction (Entry 3 and 5 in Table 1). A control experiment with Nb₂O₅-scCO₂ as catalyst but without the use of H₂O₂ gave almost no conversion of aniline (Table 1, Entry 6), thus confirming the need of H₂O₂ as the oxidant and excluding a significant contribution of oxygen from air as the oxidant.

A leaching test was performed to evaluate the heterogeneous nature of the Nb₂O₅-scCO₂ catalyst. After 10 min of reaction, the Nb₂O₅-scCO₂ catalyst was separated from the reaction mixture. At this stage, the aniline conversion was 4%. The filtrate was stirred for further 35 min at room temperature. No further increase in aniline conversion was observed (Fig. S2†), which indicates that no or negligible leaching of active species occurred, thus demonstrating that the Nb₂O₅-scCO₂ catalyst is truly heterogeneous. Importantly, based on the results of the catalytic test with Nb₂O₅-scCO₂, the H₂O₂ utilisation efficiency was calculated to be 95%, which indicates that the Nb₂O₅-scCO₂ was highly selective in activating H₂O₂ towards the conversion of aniline against the competitive decomposition into H₂O and O₂. Further insight in the catalytic reaction was provided by a kinetic study during which the temperature of the reaction mixture was monitored (Fig. S2†). The exothermic nature of the reaction led to a notable increase of the temperature of the reaction mixture after 25 min reaction time, reaching 77 °C at around 37 min reaction time, which corresponds to the time at which the maximum in aniline conversion was reached. At that moment, we also observed a bubbling phenomenon which was most probably promoted by the decomposition of residual H₂O₂ by the catalyst. These data suggest that the heat from the exothermic reaction promoted the decomposition of H₂O₂ and that, in turn, the complete consumption of H₂O₂ caused by the decomposition reaction prevented further conversion of aniline. The increase of the temperature of the solution as the exothermic reaction proceeded also explains the observed gradual increase in the reaction rate (compare the conversion rate between 15 and 30 min with that between 30 and 40 min in Fig. S2.b†). Different mechanisms have been proposed for the activation of hydrogen peroxide by Nb₂O₅ catalysts, involving the formation of active oxygen species, among which metal (hydroxy)peroxy species and hydroxyl radicals are the most common.^{46,50} In order to gain more insight on how Nb₂O₅-scCO₂ activates H₂O₂ towards the oxidation of aniline, a control experiment was conducted under the optimum reaction conditions but with the addition of TEMPO (1 mol% relative to H₂O₂), which has been widely reported to act as a hydroxyl



radical scavenger.^{51,52} A drastic decrease in the conversion of aniline to 5% was observed (Table 1, Entry 7). In light of the above experimental findings, the aniline oxidative coupling with H₂O₂ is proposed to follow a free-radical mechanism. The catalytic cycle most likely starts with the formation of niobium hydroperoxo (Nb-OOH) species through the reaction between surface niobium-hydroxyls (Nb-OH) and H₂O₂.^{46,50} Then, the interaction between Nb-OOH and H₂O₂ can generate highly reactive hydroxyl radicals ([•]OH) and hydroperoxo radicals ([•]OOH) and/or niobium peroxy radicals (NbO₂[•]) (Scheme S1[†]). This mechanism is supported by previous spectroscopic studies, which identified the formation of all these three radical species when metal-hydroperoxo species interact with H₂O₂.^{46,53} The formed radicals lead to the oxidation of aniline to form phenylhydroxylamine and nitrosobenzene (Scheme 1 and S1[†]), which in turn can react with each other through a condensation reaction yielding azoxybenzene and water as final products (Scheme 1). The final condensation step can be catalysed by the Brønsted acid sites provided by the -OH groups on the surface of Nb₂O₅-scCO₂ catalyst, which have been reported to be able to catalyse other dehydration reactions.⁴⁰⁻⁴²

The results obtained with Nb₂O₅-scCO₂ using a R_{c/s} = 0.005 suggested that our catalyst might perform well at even lower catalyst loading. Therefore, we carried out a kinetic test with a R_{c/s} = 0.002 while maintaining the other reaction conditions. The aniline conversion reached 85% with an azoxybenzene selectivity of 88% after 60 min, which remained constant at longer reaction times (Fig. 2a). The side products were 5% of nitrosobenzene, 5% of nitrobenzene and 2% of azobenzene. The TOF value with this lower catalyst loading (calculated after 60 min of reaction) was even more notable, reaching 305 h⁻¹. This result proves that the Nb₂O₅-scCO₂ catalyst is able to reach very high aniline conversion also with this extremely low catalyst loading. These conditions were also employed for a comparison between Nb₂O₅-scCO₂ and a catalyst prepared

Fig. 2 Conversion of aniline with (a) Nb₂O₅-scCO₂ and (b) Nb₂O₅-Ref catalyst as a function of time. Reaction condition: 50 mmol aniline, 70 mmol 30 wt% H₂O₂, 25 mmol anisole, 25 mL ethanol, 10 mg selected catalyst, room temperature, 75 min.


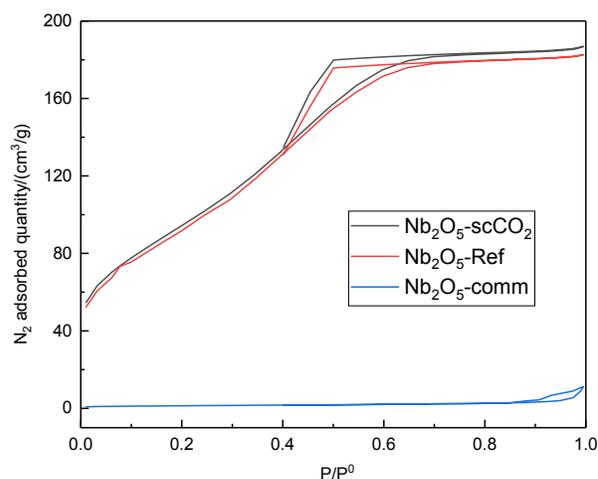


Fig. 3 N₂ adsorption-desorption isotherms of Nb₂O₅-scCO₂, Nb₂O₅-Ref and Nb₂O₅-Comm.

with the same procedure but without the involvement of scCO₂ (Nb₂O₅-Ref). The comparison was based on a kinetic test in which we monitored the conversion of aniline and the selectivity of products as a function of reaction time by GC analysis (Fig. 2) and visually (Fig. S3[†]). These results indicate that Nb₂O₅-scCO₂ was able to catalyse the reaction much faster than Nb₂O₅-Ref. The conversion of aniline over Nb₂O₅-scCO₂ reached the maximum (85%) within 60 min, whereas only 11% conversion of aniline with 55% selectivity of azoxybenzene was achieved over Nb₂O₅-Ref at the same reaction time. This difference in activity was also reflected by the significantly lower TOF for the Nb₂O₅-Ref catalyst (24 h⁻¹, calculated after 60 min of reaction based on the 59 wt% Nb content determined by ICP-OES) compared to that for Nb₂O₅-scCO₂.

With the purpose of correlating the remarkable catalytic performance of Nb₂O₅-scCO₂ to its physicochemical properties, we performed a characterisation study by means of N₂-physisorption, XRD, FTIR and TEM. The textural properties of selected catalysts were investigated by N₂-physisorption. The adsorption-desorption isotherms of Nb₂O₅-scCO₂ and Nb₂O₅-Ref belong to type IV and have hysteresis loops at high p/p⁰ value (Fig. 3), which is attributed to the presence of interparticle void spaces at the mesopore scale. Nb₂O₅-scCO₂ exhibits a slightly higher specific surface area compared to Nb₂O₅-Ref (340 m²/g vs. 305 m²/g), and both of them are significantly higher than those of the commercial catalysts used as reference (Nb₂O₅-Comm: 5 m²/g; TiO₂-P25: 65 m²/g; WO₃-Comm: 3 m²/g). The surface areas of Nb₂O₅-scCO₂ and Nb₂O₅-Ref are also higher than those of Nb₂O₅ materials synthesised by different routes but with similar (200 °C)⁵⁴ or even lower (60 or 80 °C)^{40,42} temperature of the thermal treatment, which range between 142 and 184 m²/g. The high surface area of Nb₂O₅-scCO₂ can contribute to explain its catalytic activity as it implies a higher number of exposed active sites that are easily

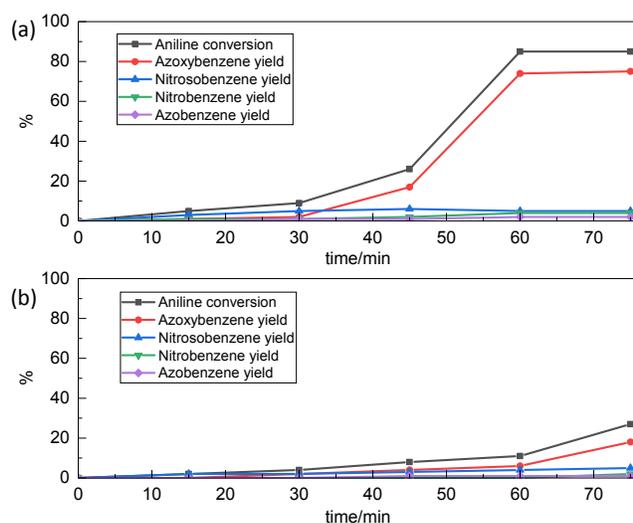

accessible to the reactants per gram of material, particularly compared to the commercial catalysts displaying very low surface area (Nb₂O₅-Comm, TiO₂-P25, WO₃-Comm).

The crystallinity of selected catalysts was examined by XRD measurement. Both patterns of Nb₂O₅-scCO₂ and Nb₂O₅-Ref display two characteristic broad peaks centred at around 28° and 53°, corresponding to the amorphous Nb₂O₅ structure that consists of NbO₄ tetrahedra and NbO₆ octahedra (Fig. 4).^{14,55} The amorphous nature of these two materials contrasts with the crystalline structure of Nb₂O₅-Comm (Fig. 4), with the pattern corresponding to the orthorhombic phase mainly consisting of NbO₆ octahedra (JCPDS No. 00-028-0317).^{14,56} Crystalline Nb₂O₅ is typically obtained through thermal treatment of amorphous or low crystallinity materials, during which the -OH groups on the surface gradually condense.

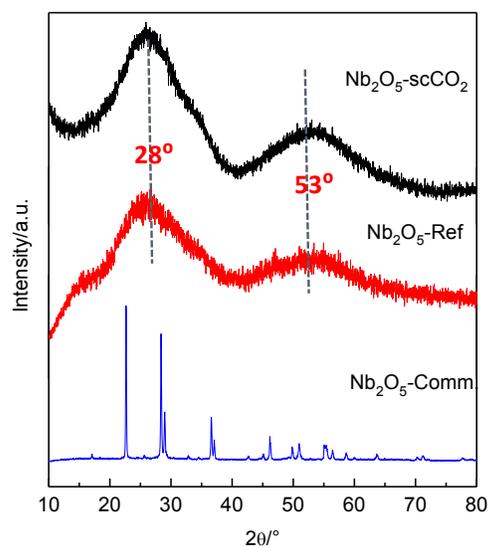


Fig. 4 XRD patterns of Nb₂O₅-scCO₂, Nb₂O₅-Ref and Nb₂O₅-Comm.

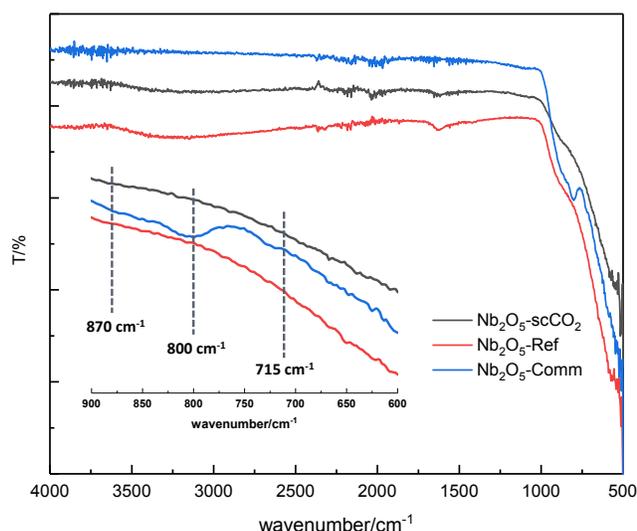


Fig. 5 FTIR spectra of Nb₂O₅-scCO₂, Nb₂O₅-Ref and Nb₂O₅-Comm. The small bands between 2000-2500 cm⁻¹ present in all three spectra are due to adsorption of CO₂ from air.

Therefore, the degree of crystallinity is generally reflected in the surface hydrophilicity, which can be estimated by FTIR analysis. The peaks centred at 1640 cm⁻¹ in the FTIR spectra of Nb₂O₅-scCO₂ and Nb₂O₅-Ref are assigned to the -OH bending mode of physisorbed water.⁴⁰ The broad absorption peaks in the range of 2800-3600 cm⁻¹ of these two spectra, are assigned to -OH stretching vibrations from physisorbed water⁴⁰ and, in analogy to other amorphous metal oxides,^{23,57} to surface hydroxyl groups. These signals indicate the hydrophilic nature of the surface of Nb₂O₅-scCO₂ and Nb₂O₅-Ref. On the other hand, these peaks are virtually absent in the spectrum of Nb₂O₅-Comm (Fig. 5), indicating the much lower hydrophilicity of this material. The FTIR spectra of Nb₂O₅-scCO₂ and Nb₂O₅-Ref are quite similar, referring to the amorphous Nb₂O₅ structure. The FTIR spectrum of Nb₂O₅-Comm showed a well-defined absorption peak at ~800 cm⁻¹ and two shoulders at ~870 cm⁻¹ and ~715 cm⁻¹, which are characteristic of the Nb₂O₅ orthorhombic crystalline structure,⁵⁶ in agreement with XRD results, whereas such peaks are absent in the spectra of the amorphous Nb₂O₅-scCO₂ and Nb₂O₅-Ref (Fig. 5). Based on the XRD and FTIR analyses, the higher activity of Nb₂O₅-scCO₂ and Nb₂O₅-Ref compared to Nb₂O₅-Comm is ascribed to the larger surface area of the two amorphous materials and the presence of surface -OH groups on their surfaces. The combination of these two features implies a much higher density of surface niobium-hydroxyls, which are the proposed catalytic sites for the activation of H₂O₂ (see Scheme S1[†]). This hypothesis is further supported by the drastic decrease in specific surface area (2 m²/g) and aniline conversion (4%, see Table 1, Entry 8) observed by converting Nb₂O₅-scCO₂ into crystalline niobium oxide upon calcination at 800 °C (Fig. S4[†]).

The above characterisation still does not explain of the observed difference in catalytic activity between Nb₂O₅-scCO₂ and Nb₂O₅-Ref (see Fig. 2). A clue in this sense is provided by the TEM analysis of the two materials. Nb₂O₅-scCO₂ consists of discrete nanoparticles with small size and narrow particle size distribution in the 4 to 9 nm range (Fig. 6a and Fig. S5[†]). Some aggregated particles are also observed, though these might be caused simply by inadequate dispersion of the Nb₂O₅ nanoparticles in ethanol during the preparation of the TEM sample. On the other hand, the Nb₂O₅-Ref material prepared without scCO₂ mainly consists of aggregated larger particles with size between 50 to 100 nm (Fig. 6b). Such aggregation is probably caused by condensation reactions that are prevented if the synthesis is carried out in scCO₂ medium. The difference in morphology brought about by scCO₂ synthesis is likely to enable a better contact between the catalyst particles and the reactants in the liquid-phase oxidation of aniline, and would thus account for the superior catalytic activity of Nb₂O₅-scCO₂ compared to Nb₂O₅-Ref. The two materials were also characterised by SEM (Fig. S6[†]), though this analysis only indicates that for both catalysts the nanoparticles tend to aggregate into large secondary particles, which disgregate



once the materials are suspended in a liquid (as proven by the fact that such secondary particles are not observed by TEM).

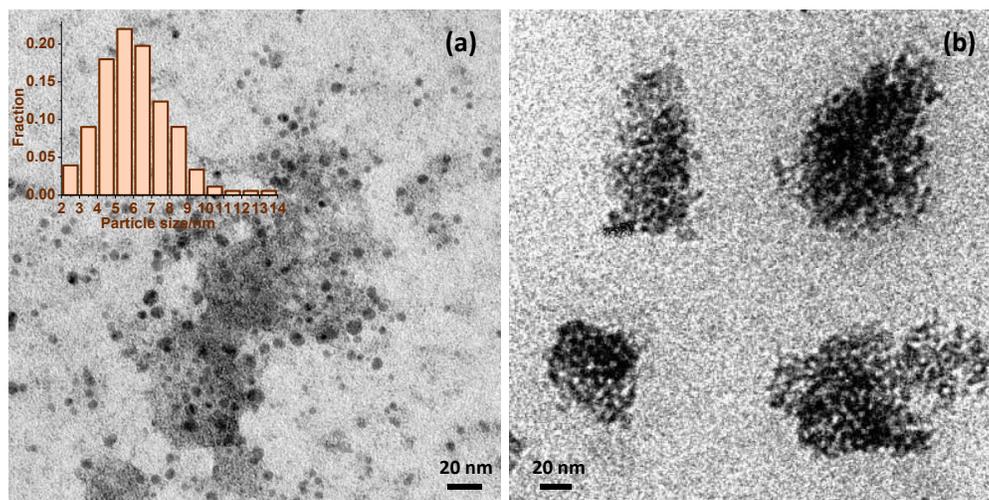


Fig. 6 TEM images of (a) Nb₂O₅-scCO₂ and (b) Nb₂O₅-Ref.

Optimising the reaction conditions and catalyst reusability

Once the best catalyst for the oxidation of aniline to azoxybenzene was identified (Nb₂O₅-scCO₂), the reaction conditions were optimised with the aim of enhancing the aniline conversion and azoxybenzene selectivity. Firstly, the aniline-to-H₂O₂ ratio was optimised (Fig. 7). The theoretical stoichiometric ratio to achieve full conversion of aniline is 1:1.5 (see Scheme 1). When the reaction was performed with an under-stoichiometric amount of oxidant (1:1 ratio between aniline and H₂O₂), 63% of aniline conversion with an azoxybenzene selectivity of 98% was achieved over Nb₂O₅-scCO₂, which is very close to the maximum theoretical conversion under these conditions (67%). Upon increasing the relative amount of H₂O₂ so that full conversion is theoretically achievable, 92% of aniline conversion was obtained. Although this conversion with aniline-to-H₂O₂ ratio of 1:1.5 is higher than with 1:1.4, full conversion was not achieved and the azoxybenzene selectivity slightly decreased. This is attributed to the consumption of H₂O₂ caused by the formation of other side products and to H₂O₂ decomposition. For 1:1.5 ratio between aniline and H₂O₂, the reaction was also performed by adding the H₂O₂ dropwise for the first 15 minutes, with the aim of decreasing the chance of its decomposition and thus enhancing its utilisation. However, this did not prove beneficial and the aniline conversion and azoxybenzene selectivity obtained (*data not shown*) were the same as those obtained for the experiment in which all H₂O₂ was added initially. A further increase of the relative amount of H₂O₂ led to higher aniline conversion, eventually reaching full conversion for a 1:1.7 ratio between aniline and H₂O₂. However, under these conditions the selectivity towards azoxybenzene dropped to 84% with increase in the formation of side products (i.e. nitrosobenzene, nitrobenzene and trace amount of azobenzene). Nitrosobenzene was detected as the only side

product when aniline-to-H₂O₂ ratio of 1:1 was used. Nitrobenzene was also detected as side product when an aniline-to-H₂O₂ ratio equal to 1:1.4 was used and with higher relative amount of H₂O₂, with the yields of this compound increasing with the increasing of H₂O₂ amount as a consequence of over-oxidation of the reaction intermediates (Scheme 1). Since the yield of azoxybenzene achieved using a 1:1.4 ratio between aniline and H₂O₂ (79%) increased only in a minor way by increasing the relative amount of hydrogen peroxide, while this caused a gradual drop in azoxybenzene selectivity (92%), this ratio between substrate and oxidant was employed in the following steps of this study.

Aqueous hydrogen peroxide is commercially available in different concentrations. The presence of water could be detrimental as it can compete with hydrogen peroxide for adsorption on the catalyst surface and could hinder the dehydration step form phenylhydroxylamine and



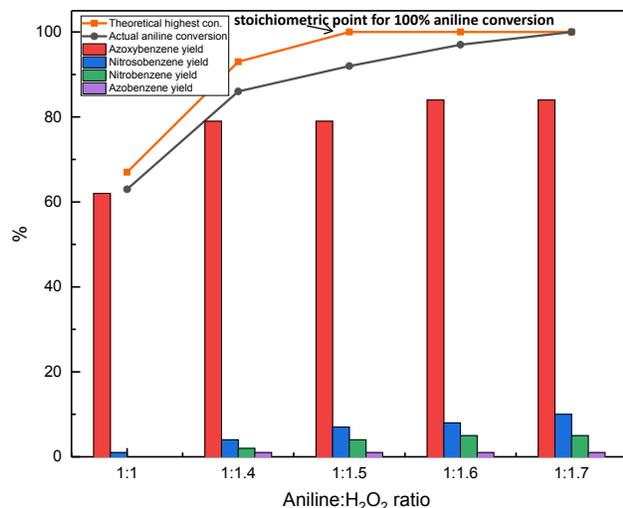


Fig. 7 Effect of aniline : H₂O₂ ratio on aniline conversion. Reaction conditions: 20 mmol aniline, 30 wt% H₂O₂ (20 to 34 mmol), 10 mmol anisole, 10 mL ethanol, 10 mg Nb₂O₅-scCO₂ catalyst, room temperature, 45 min.

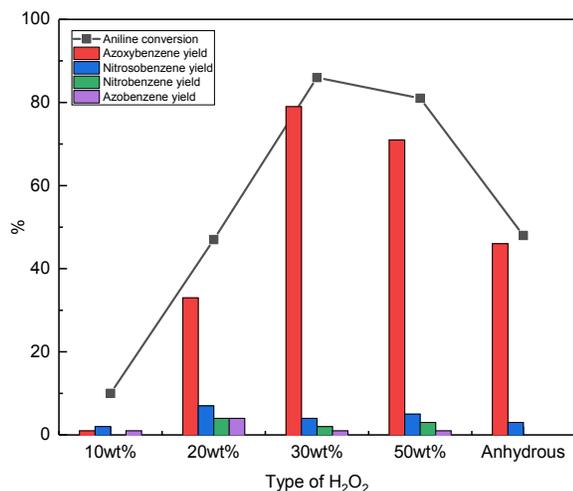


Fig. 8 Effect of H₂O₂ concentration on aniline conversion. Reaction conditions: 20 mmol aniline, 28 mmol of aqueous H₂O₂ (with the amount of H₂O being different in each test), 10 mmol anisole, 10 ml ethanol, 10 mg Nb₂O₅-scCO₂ catalyst, room temperature, 45 min.

nitrosobenzene to azoxybenzene. To test these hypotheses, the effect of using different concentrations of H₂O₂ was investigated (Fig. 8 and Fig. S7[†]). Although visual observation of the colour of the reaction mixture clearly indicated that the rate of azoxybenzene formation in the first 25 min of reaction was higher with higher concentration of hydrogen peroxide (Fig. S7[†]), at the end of the catalytic test (45 min), the highest aniline conversion and azoxybenzene selectivity were obtained with 30 wt% H₂O₂ rather than with 50 wt% H₂O₂ (Fig. 8). In the literature, higher rate of azoxybenzene formation was observed over a TiO₂ catalyst by employing hydrogen peroxide solutions with higher concentration.²³ Such relation between

H₂O₂ concentration and reaction rate can be ascribed to the lower dilution effect with higher concentration of H₂O₂ solution, which would grant higher accessibility of aniline and H₂O₂ to the catalyst and lead to faster heat transfer with consequent faster rise of the temperature of the reaction mixture and thus higher reaction rate.^{26,30,32,33} Additionally, the amount of water is the lowest with 50 wt% H₂O₂, thus probably facilitating the dehydration between phenylhydroxylamine and nitrosobenzene to form azoxybenzene. Although this trend is followed with our Nb₂O₅-scCO₂ catalyst in the first 25 min of reaction (Fig. S7[†]), it is valid over the whole catalytic test only for H₂O₂ concentration up to 30 wt% (Fig. 8). The observed lower yield of azoxybenzene with 50 wt% H₂O₂ compared to 30 wt% H₂O₂ at the end of the catalytic test can be ascribed to higher extent of H₂O₂ decomposition in the former case, as a consequence of faster and larger temperature increase in the more concentrated reaction mixture. This hypothesis was supported by performing a test with the Nb₂O₅-scCO₂ catalyst using 1.7 times H₂O₂ (50 wt% aqueous solution) relative to aniline. Under these conditions, 94% aniline conversion with 87% azoxybenzene selectivity was obtained, compared to the full conversion of aniline achieved with 30 wt% H₂O₂ (Fig. 7), suggesting that a higher percentage of H₂O₂ was decomposed when 50 wt% H₂O₂ was used. In addition, according to the Global Harmonised System (GHS) for the classification and labelling of chemicals, 50 wt% H₂O₂ belongs to GHS03 hazard category (oxidising liquid), which requires more rigid precautionary measures than 30 wt% H₂O₂. Therefore, the use of 30 wt% H₂O₂ is preferable not only because it gives higher utilisation efficiency of H₂O₂ with the Nb₂O₅-scCO₂ catalyst, but also in terms of safety concerns and, therefore, in the context of the green chemistry principles.

The solvent in which the reaction takes place was also optimised by screening a set of solvents with different polarity and aprotic/protic nature (Table 2). These solvents were selected because they form a single phase with aniline and the aqueous H₂O₂ solution, thus averting mass transfer problem associated to the presence of different liquid phases. According to the CHEM21 guide for ranking the greenness of solvents,³⁴ the selected alcohols and acetone are recommended solvents, acetonitrile is recognised as a problematic solvent, whereas 1,4-dioxane is labelled as hazardous. The use of ethanol as solvent led to the highest azoxybenzene yield (79%) and selectivity (92%), while isopropanol gave the highest aniline conversion (90%), which represents a slight improvement compared to that in ethanol (86%). Although there is no clear correlation between the catalytic activity and solvent polarity (Fig. S8[†]), in general the aniline conversion and azoxybenzene yield are higher in protic solvents compared to those in aprotic solvents. Such positive effect of the protic solvents can be related to the radical mechanism over the Nb₂O₅-scCO₂ catalyst. It has been reported that the polarisation of hydroxyl radicals in protic

Table 2 Effect of the solvent on the activity of Nb₂O₅-scCO₂ catalyst in oxidative coupling of aniline to azoxybenzene



Solvent	Aprotic (A) or Protic (P)	Boiling point (°C)	Dipole moment (D)	Dielectricity constant (at 25 °C)	Conversion (%) ^a	Yield (%)				Selectivity (%)			
						Azoxy	Nitroso	Nitro	Azo	Azoxy	Nitroso	Nitro	Azo
1,4-Dioxane	A	88	0.45	2.2	58	48	5	3	2	82	9	5	4
Acetone	A	56	2.85	20.7	54	45	4	3	3	83	7	5	5
Acetonitrile	A	82	3.92	37.5	78	52	17	6	3	66	22	8	4
2-Butanol	P	98	1.66	16.6	82	67	7	4	3	83	9	5	3
Isopropanol	P	83	1.66	17.9	90	77	8	4	1	86	9	4	1
Ethanol	P	78	1.69	24.3	86	79	4	2	1	92	5	2	1
Methanol	P	65	1.69	32.7	81	69	8	4	0	86	10	4	0

Reaction conditions: 20 mmol aniline, 28 mmol 30 wt % H₂O₂, 10 mmol anisole, 10 mL selected solvent, 10 mg Nb₂O₅-scCO₂ catalyst, room temperature, 45 min. ^a Under the employed reaction conditions (aniline : H₂O₂ = 1 : 1.4), the theoretical maximum conversion is 93%.











solvents is stronger than that in aprotic solvents,⁵⁸ thus increasing the electrophilicity of the radical and promoting its reactivity. It should be noted that other solvent-related factors might play a role too, including the radical quenching ability of solvents,⁵⁹ their interaction with the catalyst surface and their solvating and stabilising effect on reactants, intermediates and products.^{25,28,60,61}

Finally, the recyclability of the Nb₂O₅-scCO₂ catalyst in consecutive runs under the optimum reaction conditions was tested (Fig. S9[†]), demonstrating that the catalyst fully retained its activity and selectivity in 4 consecutive runs (aniline conversion or azoxybenzene selectivity ±2%).



Substrate scope

Having established the best reaction conditions, we completed our study by investigating the scope of substrates that can be converted over Nb₂O₅-scCO₂ (Table 3). For this purpose, we selected substituted anilines with different type and position of the substituting group. Some of these substituted anilines would afford azoxy products that can find application in pharmaceutical compounds (from alkyl-substituted anilines) and liquid crystals (from *para*-anisidine).^{6,7} Nb₂O₅-scCO₂ efficiently catalysed the transformation of all investigated alkyl-substituted aniline with high conversion (≥ 78%), though the unsubstituted aniline affords the highest yield of azoxy product in 45 min. Although the conversion of the alkyl substituted anilines are in the same range, the selectivity

Table 3 Activity of Nb₂O₅-scCO₂ catalyst in the conversion of different substituted anilines.

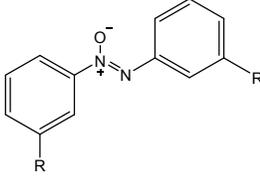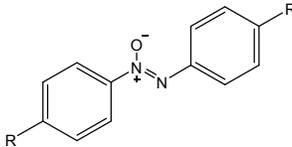Anilines	Conversion (%) ^a	Selectivity (%)			
		Azoxy.	Nitroso.	Nitro.	Azo
	R: methyl = 78 R: ethyl = 81	 R: methyl = 47 R: ethyl = 45	 R: methyl = 53 R: ethyl = 55		
	R: methyl = 82 R: ethyl = 84	 R: methyl = 72 R: ethyl = 75	 R: methyl = 21 R: ethyl = 24	 R: methyl = 6 R: ethyl = 1	 R: methyl < 1 R: ethyl < 1
	R: methyl = 81 R: ethyl = 81	 R: methyl = 80 R: ethyl = 83	 R: methyl = 20 R: ethyl = 17		

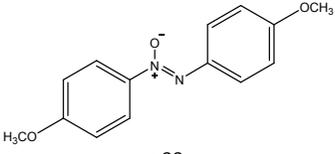

 <i>para</i> -anisidine	53	 >99			
 benzylamine	0				

Reaction conditions: 20 mmol substituted aniline, 28 mmol 30 wt% H₂O₂, 10 mmol anisole, 10 mL ethanol, 10 mg Nb₂O₅-sCO₂ catalyst, RT, 45 min. ^a Under the employed reaction conditions (aniline : H₂O₂ = 1 : 1.4), the maximum theoretical conversion is 93%.

towards the azoxy product is strongly influenced by the presence and position of the alkyl group on the aromatic ring. Among the alkyl-substituted anilines, the highest selectivity towards the azoxy product was observed when the alkyl group was in *para*-position, followed by the *meta* and *ortho* positions.^{28,48} The main side product was the corresponding alkyl-nitrosobenzene, which becomes the major product with the *ortho*-substituted anilines. These results indicate that the alkyl substituents do not play a major role in the initial oxidation of the amino group with hydrogen peroxide, but have a relevant steric effect in the condensation step that leads to the formation of the azoxy product (Scheme 1). The reaction with *para*-anisidine achieved 53% conversion, which is lower compared to the conversion obtained with aniline and alkyl-substituted anilines. This is ascribed to the presence of the methoxy substituent, which is expected to increase the electron density of -NH₂ group in *para*-anisidine as a consequence of the resonance effect of this substituent (dominating over its electron withdrawing inductive effect). The higher electron density on the amino group compared to that in aniline is detrimental for the radical-induced oxidation steps.⁵⁸ Furthermore, no conversion was observed using benzylamine as substrate. The difficulty in converting benzylamine under the employed mild conditions is also between the amino group and the aromatic ring in benzylamine that disrupts the resonance effect, thus decreasing the electrophilicity of -NH₂ and thus negatively affecting its reactivity towards the hydroxyl radical species.

Conclusions

In this work, Nb₂O₅ nanoparticles with high specific surface area (340 m²/g) were prepared by a novel, supercritical-CO₂-assisted method and was applied as heterogeneous catalyst for the oxidative coupling of aniline with the H₂O₂ to produce azoxybenzene. The catalyst achieved excellent activity and selectivity towards azoxybenzene in a short time (45 min) under mild conditions (no applied heating) and with a catalyst loading that was much lower compared to those reported in the literature for this reaction. Full aniline conversion could be achieved by employing an only small excess of H₂O₂ compared to the stoichiometric amount, demonstrating a high efficiency

of the catalyst in activating hydrogen peroxide towards the desired oxidation. A control test in the presence of a radical scavenger suggested that the reaction follows a free-radical pathway. The Nb₂O₅-sCO₂ catalyst does not suffer from leaching and can be reused in consecutive runs without losing activity. Notably, the catalyst is also versatile as it is active in the conversion of a variety of substituted anilines, though the selectivity towards the azoxy product is lower particularly for *ortho*-substituted substrates. The discrete nanoparticle morphology brought about by utilisation of sCO₂ in the synthesis accounts for the much superior catalytic performance of Nb₂O₅-sCO₂ compared to state-of-the-art catalysts for this reaction. The green aspects of this system include the use of an environmentally benign oxidant as H₂O₂, the extremely mild reaction conditions, the use of a green solvent as ethanol, the short reaction time, the extremely low catalyst loading and the high efficiency in the utilisation of H₂O₂. These features are also attractive in the perspective of an industrial application of this catalytic system. Additionally, the sCO₂-assisted method that led to the synthesis of this excellent Nb₂O₅ catalyst has the potential to be applied to the preparation of other metal-oxide heterogeneous catalysts.

Conflicts of interest

There are no conflicts to declare.

Acknowledgements

Yehan Tao acknowledges financial support from the China Scholarship Council (CSC) for her Ph.D. grant. The authors acknowledge Leon Rohrbach and Marcel de Vries for their analytical and technical support.

References

- H. Takahashi, T. Ishioka, Y. Koiso, M. Sodeoka, Y. Hashimoto, *Biological and Pharmaceutical Bulletin*, 2000, **23** (11), 1387-1390.
- A. B. Vix, P. Müller-Buschbaum, W. Stocker, M. Stamm, J. P. Rabe, *Langmuir*, 2000, **16** (26), 10456-10462.



ARTICLE

Journal Name

- 3 D. Aronzon, E. P. Levy, P. J. Collings, A. Chanishvili, G. Chilaya, G. Petriashvili, *Liquid Crystals*, 2007, **34** (6), 707-718.
- 4 E. Voutyritsa, A. Theodorou, M. G. Kokotou, C. G. Kokotos, *Green Chemistry*, 2017, **19** (5), 1291-1298.
- 5 E. Bunzel, B. T. Lawton, *Canadian Journal of Chemistry*, 1965, **43** (4), 862-875.
- 6 K. Selvam, S. Balachandran, R. Velmurugan, M. Swaminathan, *Applied Catalysis A: General*, 2012, **413**, 213-222.
- 7 I. W. Stewart, Book: *The static and dynamic continuum theory of liquid crystals*, 2004, **17**.
- 8 H. Li, X. Xie, L. Wang, *Chemical Communications*, 2014, **50** (32), 4218-4221.
- 9 L. Liu, P. Concepción, A. Corma, *Journal of Catalysis*, 2019, **369**, 312-323.
- 10 Q. Xiao, Z. Liu, F. Wang, S. Sarina, H. Zhu, *Applied Catalysis B: Environmental*, 2017, **209**, 69-79.
- 11 Z. Liu, Y. Huang, Q. Xiao, H. Zhu, *Green Chemistry*, 2016, **18** (3), 817-825.
- 12 B. Zhou, J. Song, T. Wu, H. Liu, C. Xie, G. Yang, B. Han, *Green Chemistry*, 2016, **18** (13), 3852-3857.
- 13 <https://www.covestro.com/en/sustainability/lighthouse-projects/bio-aniline>
- 14 W. M. Ventura, D. C. Batalha, H. V. Fajardo, J. G. Taylor, N. H. Marins, B. S. NoreMBERG, T. Tański, N. L. Carreño, *Catalysis Communications*, 2017, **99**, 135-140.
- 15 Y. Shiraishi, H. Sakamoto, K. Fujiwara, S. Ichikawa, T. Hirai, *ACS Catalysis*, 2014, **4** (8), 2418-2425.
- 16 A. Grirrane, A. Corma, H. García, *Science*, 2008, **322** (5908), 1661-1664.
- 17 F. Yang, Z. Wang, X. Zhang, L. Jiang, Y. Li, L. Wang, *ChemCatChem*, 2015, **7** (21), 3450-3453.
- 18 K. Ju, R. E. Parales, *Microbiology and Molecular Biology Reviews*, 2010, **74** (2), 250-272.
- 19 M. I. Qadir, J. D. Scholten, J. Dupont, *Catalysis Science & Technology*, 2015, **5** (3), 1459-1462.
- 20 W. D. Emmons, *Journal of the American Chemical Society*, 1957, **79** (20), 5528-5530.
- 21 R. W. Murray, R. Jeyaraman, L. Mohan, *Tetrahedron Letters*, 1986, **27** (21), 2335-2336.
- 22 A. Mckillop, J. A. Tarbin, *Tetrahedron*, 1987, **43** (8), 1753-1758.
- 23 H. Tumma, N. Nagaraju, K. V. Reddy, *Applied Catalysis A: General*, 2009, **353** (1), 54-60.
- 24 L. Yang, G. Shi, X. Ke, R. Shen, L. Zhang, *CrystEngComm*, 2014, **16** (9), 1620-1624.
- 25 N. Jagtap, V. Ramaswamy, *Applied clay science*, 2006, **33** (2), 89-98.
- 26 S. Gontier, A. Tuel, *Applied Catalysis A: General*, 1994, **118** (2), 173-186.
- 27 H. Sonawane, A. V. Pol, P. P. Moghe, S. S. Biswas, A. Sudalai, *Journal of the Chemical Society, Chemical Communications*, 1994, **10**, 1215-1216.
- 28 D. R. Das, A. K. Talukdar, *ChemistrySelect*, 2017, **2** (28), 8983-8989.
- 29 S. Gontier, A. Tuel, *Journal of Catalysis*, 1995, **157** (1), 124-132.
- 30 C.-F. Chang, S.-T. Liu, *Journal of Molecular Catalysis A: Chemical*, 2009, **299** (1-2), 121-126.
- 31 S. S. Acharyya, S. Ghosh, R. Bal, *ACS Sustainable Chemistry & Engineering*, 2014, **2** (4), 584-589.
- 32 S. Ghosh, S. S. Acharyya, T. Sasaki, R. Bal, *Green Chemistry*, 2015, **17** (3), 1867-1876.
- 33 A. Shukla, R. K. Singha, L. S. Konathala, T. Sasaki, R. Bal, *RSC Advances*, 2016, **6** (27), 22812-22820.
- 34 D. Prat, A. Wells, J. Hayler, H. Sneddon, C. R. McElroy, S. Abou-Shehada, P. J. Dunn, *Green Chemistry*, 2015, **18** (1), 288-296.
- 35 Y. Tao, P. P. Pescarmona, *Catalysts*, 2018, **8** (5), 212.
- 36 M. B. Chowdhury, R. Sui, R. A. Lucky, P. A. Charpentier, *Langmuir*, 2009, **26** (4), 2707-2713.
- 37 J. Yoo, Y. Bang, S. J. Han, S. Park, J. H. Song, I. K. Song, *Journal of Molecular Catalysis A: Chemical*, 2015, **410**, 74-80.
- 38 J. Jammaer, C. Aprile, S. W. Verbruggen, Lenaerts, S.; P. P. Pescarmona, J. A. Martens, *ChemSusChem*, 2011, **4** (10), 1457-1463.
- 39 N. Farhangi, R. R. Chowdhury, Y. Medina-Gonzalez, M. B. Ray, P. A. Charpentier, *Applied Catalysis B: Environmental*, 2011, **110**, 25-32.
- 40 K. Nakajima, Y. Baba, R. Noma, M. Kitano, J. N. Kondo, S. Hayashi, M. Hara, *Journal of the American Chemical Society*, 2011, **133** (12), 4224-4227.
- 41 M. T. Reche, A. Osatiashtiani, L. J. Durndell, M. A. Isaacs, Â. Silva, A. F. Lee, K. Wilson, *Catalysis Science & Technology*, 2016, **6** (19), 7334-7341.
- 42 C. Yue, G. Li, E. A. Pidko, J. J. Wiesfeld, M. Rigutto, E. J. Hensen, *ChemSusChem*, 2016, **9** (17), 2421-2429.
- 43 A. J. Kamphuis, F. Milocco, L. Koiter, P. P. Pescarmona, E. Otten, *ChemSusChem*, 2019, **12**, 1-8.
- 44 J. V. Coelho, M. Guedes, G. Mayrink, P. P. Souza, M. C. Pereira, L. C. Oliveira, *New Journal of Chemistry*, 2015, **39** (7), 5316-5321.
- 45 A. Bozzi, R. Lavall, T. Souza, M. Pereira, P. De Souza, H. De Abreu, A. De Oliveira, P. Ortega, R. Paniago, L. C. A. Oliveira, *Dalton Transactions*, 2015, **44** (46), 19956-19965.
- 46 M. Ziolek, I. Sobczak, P. Decyk, K. Sobańska, P. Pietrzyk, Z. Sojka, *Applied Catalysis B: Environmental*, 2015, **164**, 288-296.
- 47 A. L. Lima, D. C. Batalha, H. V. Fajardo, J. L. Rodrigues, M. C. Pereira, A. C. Silva, *Catalysis Today*, 2018, doi.org/10.1016/j.cattod.2018.10.035.
- 48 G. S. de Carvalho, L. H. Chagas, C. G. Fonseca, P. P. De Castro, A. C. Sant, A. A. Leitão, G. W. Amarante, *New Journal of Chemistry*, 2019, **43**, 5863.
- 49 C. Hammond, J. Straus, M. Righettoni, S. E. Pratsinis, I. Hermans, *ACS Catalysis*, 2013, **3** (3), 321-327.
- 50 I. D. Ivanchikova, I. Y. Skobelev, N. V. Maksimchuk, E. A. Paukshtis, M. V. Shashkov, O. A. Kholdeeva, *Journal of catalysis*, 2017, **356**, 85-99.
- 51 S. S. Acharyya, S. Ghosh, R. Bal, *Chemical Communications*, 2014, **50** (87), 13311-13314.
- 52 S. S. Acharyya, S. Ghosh, R. Bal, *Chemical Communications*, 2015, **51** (27), 5998-6001.
- 53 M. Ziolek, P. Decyk, I. Sobczak, M. Trejda, J. Florek, H. G. W. Klimas, A. Wojtaszek, *Applied Catalysis A: General*, 2011, **391** (1-2), 194-204.
- 54 H. T. Kreissl, K. Nakagawa, Y.-K. Peng, Y. Koito, J. Zheng, S. C. E. Tsang, *Journal of Catalysis*, 2016, **338**, 329-339.
- 55 M. N. Catrinck, E. S. Ribeiro, R. S. Monteiro, R. M. Ribas, M. H. Barbosa, R. F. Teófilo, *Fuel*, 2017, **210**, 67-74.
- 56 M. Graça, A. Meireles, C. Nico, M. Valente, *Journal of Alloys and Compounds*, 2013, **553**, 177-182.
- 57 A. J. Bonon, Y. N. Kozlov, J. O. Bahú, R. Maciel Filho, D. Mandelli, G. B. Shul'pin, *Journal of catalysis*, 2014, **319**, 71-86.
- 58 S. Mitroka, S. Zimmeck, D. Troya, J. M. Tanko, *Journal of the American Chemical Society*, 2010, **132** (9), 2907-2913.
- 59 A. Brizzolari, G. M. Campisi, E. Santaniello, N. Razzaghi-Asl, L. Saso, M. C. Foti, *Biophysical chemistry*, 2017, **220**, 1-6.
- 60 A. G. da Silva, D. C. Batalha, T. S. Rodrigues, E. G. Candido, S. C. Luz, I. C. de Freitas, F. C. Fonseca, D. C. de Oliveira, J. G. Taylor, S. I. C. de Torresi, P. H. C. Camargo, H.V. Fajardo, *Catalysis Science & Technology*, 2018, **8** (7), 1828-1839.
- 61 S. B. Waghmode, S. M. Sabne, S. Sivasanker, *Green Chemistry*, 2001, **3** (6), 285-288.

